

Akaliko Telescopic Cylinders

Brochure



NORDSTRONG

PRESENTS

Akaliko



Proudly Introducing Akaliko

At Nordstrong Equipment Limited, we take pride in offering only the highest quality products to our valued customers. That's why we're excited to introduce our partnership with Akaliko, a line of premium telescopic cylinders that meet our stringent standards for reliability and performance. While Akaliko is not manufactured in-house, it has been rigorously tested and selected by our team to ensure it upholds the quality for which Nordstrong is known.

This catalog features two distinct series within the Akaliko product offering: the **AKT Series** and the **AKP Series**, both come with a **1-year Manufacturer Warranty**.



We invite you to explore this brochure, and for more information, or to place an order, please contact us:

Email address:

hoistsales@nordstrongltd.com

Phone call:

1 (800) 563-1553

AKP SERIES



All stages chromed for ultimate corrosion resistance!

Premium industry seals


Max operating pressure 2000 psi

Tested and Proven for Canadian climate

1-year Manufacturer Warranty

100% interchangeable with most leading brands

Akaliko AKP Series Single-Acting Telescopic Cylinders (Pin mounting)

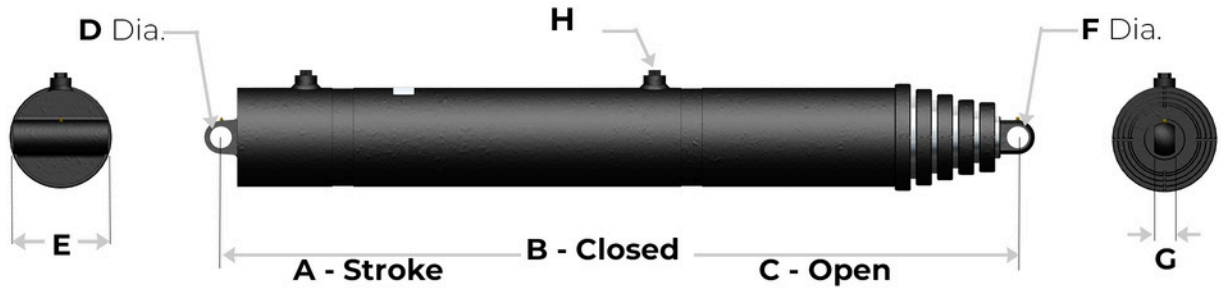

9" Bore , 5-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	Weight (lb)
AKP95-4461-340	340	90.43	429.40	2.1	10.7	2.1	2.0	1" NPTF	1245
AKP95-4461-320	320	86.6	406.50	2.1	10.7	2.1	2.0	1" NPTF	1200
AKP95-4461-300	300	82.6	382.50	2.1	10.7	2.1	2.0	1" NPTF	1230
AKP95-4461-280	280	78.6	358.50	2.1	10.7	2.1	2.0	1" NPTF	1215
AKP95-4461-265	265	75.6	340.50	2.1	10.7	2.1	2.0	1" NPTF	1200
AKP95-4461-250	250	72.6	322.50	2.1	10.7	2.1	2.0	1" NPTF	1100
AKP95-4461-235	235	65	298.00	2.1	10.7	2.1	2.0	1" NPTF	880
AKP95-4461-220	220	60.1	280.50	2.1	10.7	2.1	2.0	1" NPTF	855

8" Bore , 5-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	Weight (lb)
AKP85-4466-285	285	78.5	362.75	2.1	9.5	2.1	2.0	1" NPTF	795
AKP85-4466-280	280	77.5	357.05	2.1	9.5	2.1	2.0	1" NPTF	740
AKP85-4466-265-LONG	265	74.4	338.6	2.1	9.5	2.1	2.0	1" NPTF	715
AKP85-4453-265-SHORT	265	70.9	334.6	2.1	9.5	2.1	2.0	1" NPTF	715
AKP85-4402-250	250	68.0	317.3	2.1	9.5	2.1	2.0	1" NPTF	685
AKP85-4402-235	235	65.0	300.0	2.1	9.5	2.1	2.0	1" NPTF	650
AKP85-4402-220	220	59.9	278.5	2.1	9.5	2.1	2.0	1" NPTF	565
AKP85-4401-190	190	53.9	242.5	2.1	9.5	2.1	2.0	1" NPTF	555

7" Bore , 4-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	Weight (lb)
AKP74-4401-175	175	59.5	236.0	2.1	8.6	2.1	2.0	1" NPTF	430
AKP74-4401-135	135	53.4	208.6	2.1	8.6	2.1	2.0	1" NPTF	375

6" Bore , 4-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	Weight (lb.)
AKP64-4483-156	156	53.7	207.8	2.1	7.6	2.1	2.0	1" NPTF	293
AKP64-4480-156	156	52.4	208.1	2.1	7.6	2.1	2.0	1" NPTF	310

6" Bore , 3-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	Weight (lb)
AKP63-4402-140	140	59.8	200.4	2.1	7.6	2.1	2.0	1" NPTF	310
AKP63-4402-120	120	53.0	173.4	2.1	7.6	2.1	2.0	1" NPTF	270

Note: Many other sizes, strokes and mounting options are available. Please contact your Nordstrong Representative for more information.

AKT SERIES



All stages chromed for ultimate corrosion resistance!

Premium industry seals


Max operating pressure 2755 psi

Tested and Proven for Canadian climate

1-year Manufacturer Warranty

Trunnion dimensions compatible with most major brands

Akaliko AKT Series Single-Acting Telescopic Cylinders (Trunnion mounting)

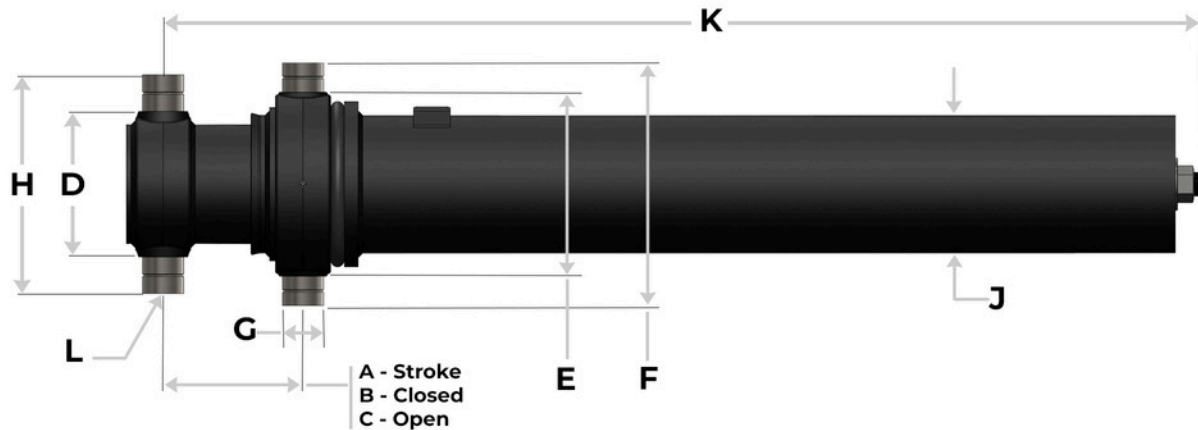

6.5" Bore , 6-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	J (in)	K (in)	L (in)	Weight (lb)
AKT6.5-6-216	216	7.6	223.6	7.9	10.20	13.2	2.25	11.9	8.00	56.3	SAE-16	606

6.5" Bore , 5-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	J (in)	K (in)	L (in)	Weight (lb)
AKT6.5-5-190	190	7.6	197.6	7.9	10.20	13.2	2.25	11.9	8.00	60.8	SAE-16	547
AKT6.5-5-180	180	7.6	187.6	7.9	10.20	13.2	2.25	11.9	8.00	58.5	SAE-16	529
AKT6.5-5-170	170	7.6	177.6	7.9	10.20	13.2	2.25	11.9	8.00	55.1	SAE-16	503

6.5" Bore , 4-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	J (in)	K (in)	L (in)	Weight (lb)
AKT6.5-4-160	160	7.6	167.6	7.9	10.20	13.2	2.25	11.9	8.00	53.3	SAE-16	487
AKT6.5-4-150	150	7.6	157.6	7.9	10.20	13.2	2.25	11.9	8.00	50.8	SAE-16	465
AKT6.5-4-140	140	7.6	147.6	7.9	10.20	13.2	2.25	11.9	8.00	48.2	SAE-16	445

5.5" Bore , 3-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	J (in)	K (in)	L (in)	Weight (lb)
AKT5.5-3-140	140	6.4	146.4	7.0	9.02	11.5	1.875	11.0	7.10	60.0	SAE-12	423
AKT5.5-3-130	130	6.4	136.4	7.0	9.02	11.5	1.875	11.0	7.10	56.9	SAE-12	401
AKT5.5-3-120	120	6.4	126.4	7.0	9.02	11.5	1.875	11.0	7.10	53.5	SAE-12	381
AKT5.5-3-110	110	6.4	116.4	7.0	9.02	11.5	1.875	11.0	7.10	49.8	SAE-12	392

4.5" Bore , 3-Stage

Part number	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	G (in)	H (in)	J (in)	K (in)	L (in)	Weight (lb)
AKT4.5-3-100	100	5.5	105.5	5.7	8.03	10.6	1.875	9.8	7.00	43.7	SAE-12	289
AKT4.5-3-90	90	5.5	95.5	5.7	8.03	10.6	1.875	9.8	6.30	41.7	SAE-12	271
AKT4.5-3-80	80	5.5	85.5	5.7	8.03	10.6	1.875	9.8	6.30	36.8	SAE-11	254

Note: Many other sizes, strokes and mounting options are available. Please contact your Nordstrong Representative for more information.



**Nordstrong Ltd.
5 Chester Street
Winnipeg, MB R2L 1W, Canada
1 (800) 563-1553**