


NTC Series



Nordic Telescopic Cylinder (NTC) – The original ag workhorse



Manufactured using polished and chromed internal diameter cylinder tubing in combination with long-lasting polyurethane wipers; the sealing remains on the inside, hidden away from the elements, guaranteeing long life and low maintenance. Long overlaps of each stage providing exceptional stability when fully extended while bolt-on saddle and upper pivot blocks make them simple and easy to install. For assistance in determining the correct telescopic cylinder for your application, please consult a qualified Nordic representative.

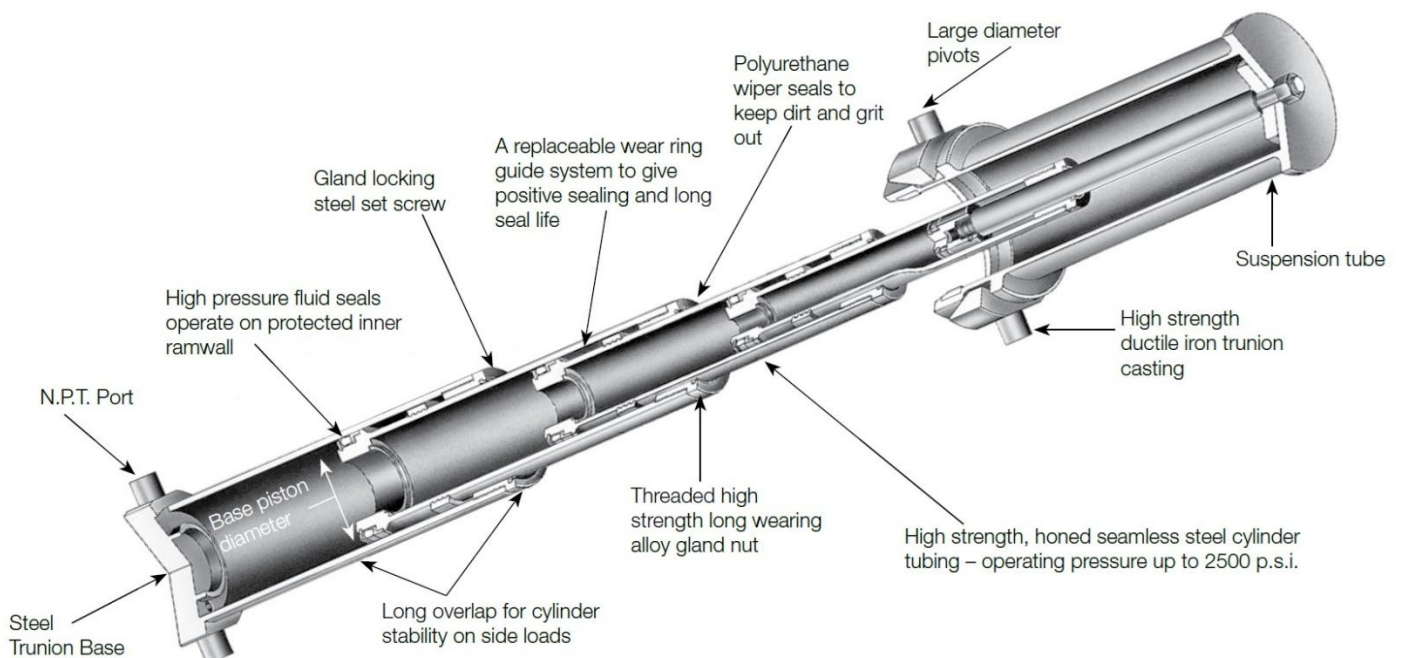

Model	NTC 168-5-4	NTC 216-6-5
Part Number	4099A	4040A
Effective diameter (in)	5	6
Number of stages	4	5
Capacity (tons)	20 - 25	20 - 30
Body length (ft)	Grain 18 - 20	Grain 22 - 24
Weight (lb)	336	475
Minimum oil capacity (U.S. GAL.)	7.1	14.8
A - STROKE (in)	168	216
B - CLOSED (in)	6 $\frac{5}{8}$	6 $\frac{5}{8}$
C (in)	58	64
D (in)	7 $\frac{5}{8}$	8
E (in)	1	1 $\frac{1}{4}$
F (in)	7	7 $\frac{3}{4}$
G (in)	2.125	2.125
H (in)	1 $\frac{7}{8}$	2 $\frac{1}{4}$
J (in)	9	10
K (in)	2	2
L - PORT SIZE	$\frac{3}{4}$ " NPT	1" NPT



Model
XXX-Y-Z

No. of Stages
 Base piston diameter
 Stroke

