


NTGC Series


Nordic Telescopic Ground Cylinder (NTGC)



Manufactured using ground outer diameter cylinder tubing in combination with long-lasting polyurethane wipers the NTGC series' tubes remain bathed in oil when retracted, guaranteeing long life and low maintenance. Long overlaps of each stage providing exceptional stability when fully extended while bolt-on saddle and upper pivot blocks make them simple and easy to install. For assistance in determining the correct telescopic cylinder for your application, please consult a qualified Nordic representative.

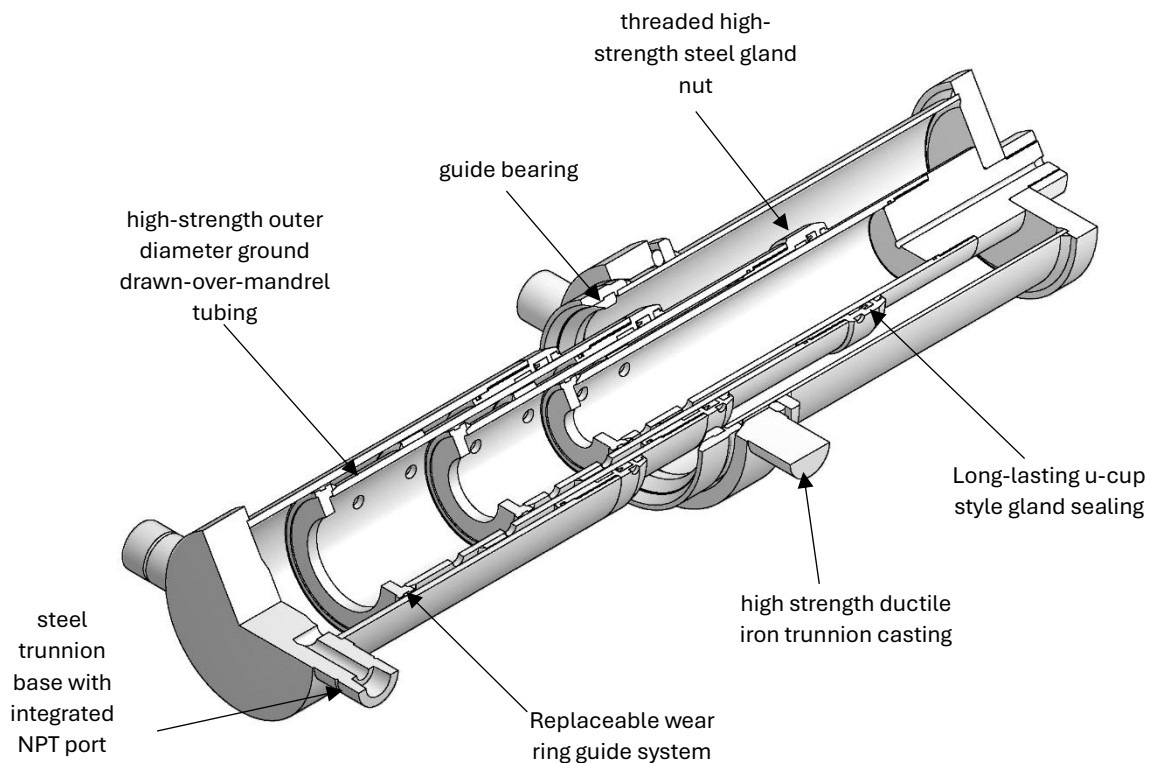

Model	NTGC 120-4.5-3	NTGC 130-5.5-3	NTGC 140-5.5-3	NTGC 150-5.5-4	NTGC 156-6.5-4	NTGC 180-6.5-4
Part Number	45298A	44432A	41959A	46644A	42267A	42268A
Effective diameter (in)	4 ½	5 ½	5 ½	5 ½	6 ½	6 ½
Number of stages	3	3	3	4	4	4
Capacity (tons)	15 - 20	20 - 30	20 - 30	20 - 30	25 - 35	25 - 35
Body length (ft)	13	12 - 14	14 - 15	16	15 - 16 ½	16 - 20
Weight (lb)	234	355	378	373	501	494
Min. oil cap. (U.S. GAL.)	4.41	8	8.6	9.9	13.5	14.5
A - STROKE (in)	120	130	140	150	156	180
B - CLOSED (in)	6 ⅝	6 ⅞ ₁₆	6 ⅞ ₁₆	6 ⅞ ₁₆	7 ½	7 ½
C (in)	53 ¾	57 ½	60 ⅝	60 ½	62 ⅝	62 ⅝
D (in)	6 ¼	8	8	8	8 ¾	8 ¾
E (in)	1	1	1	1	1 ⅝	1 ⅝
F (in)	5 ¾	7	7	7	7 ¾	7 ¾
G (in)	2	2 ⅛	2 ⅛	2 ⅛	2 ⅛	2 ⅛
H (in)	1 ⅞	1 ⅞	1 ⅞	1 ⅞	2 ¼	2 ¼
J (in)	8 ¼	9	9	9	10 ⅜ ₁₆	10 ⅜ ₁₆
K (in)	1 ⅝	2	2	2	1 ½	1 ½
L - PORT SIZE	¾" NPT	¾" NPT	¾" NPT	¾" NPT	1" NPT	1" NPT

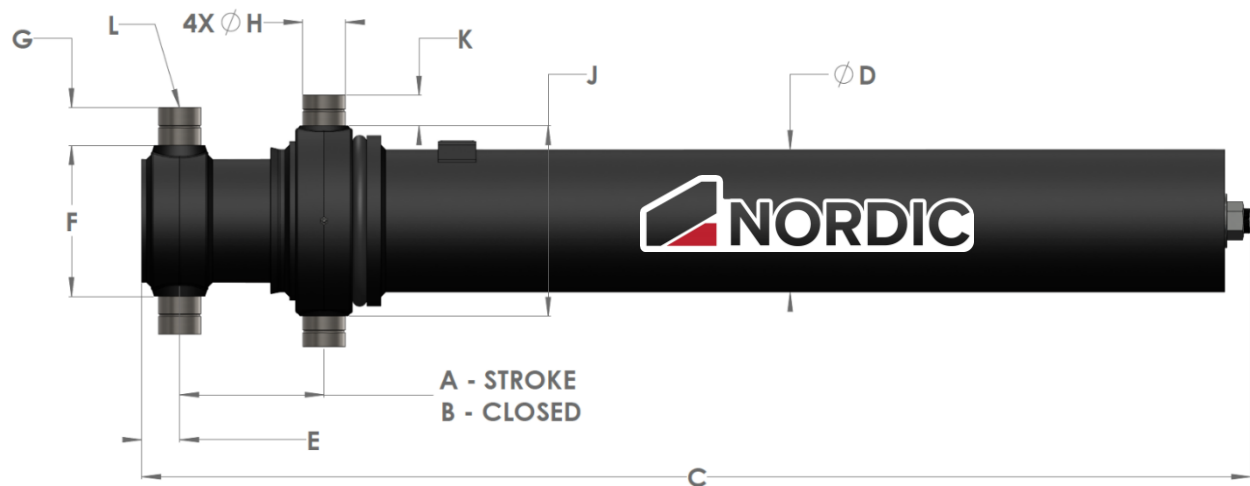

Model
XXX-Y-Z

No. of Stages
 Base piston diameter
 Stroke

